

KUT PLAST NC

Set Accelerating Admixture For Concrete & Mortar

ADM-19-1110



DESCRIPTION

KUT PLAST NC is a chloride free, water reducing, set accelerating admixture based on selected synthetic polymers. It is supplied as a water white to light brown solution which is instantly dispersible in water.

USES

SETTING TIME & STRENGTH

The addition of **KUT PLAST NC** in the recommended amounts will reduce the initial setting time of concrete by 40 to 60 % and the final setting time proportionally. As a result the time to finishing will be substantially reduced.

By increasing the rate of hydration of the cement, **KUT PLAST NC** increases the rate of strength development of cement mixes. For example it is not uncommon to obtain normal 3 day strengths in 1 day or normal 7 day strengths in 3 days.

A variable dosage is given for **KUT PLAST NC** when used in concrete in order to compensate for differences in materials and mix designs throughout the gulf and variable winter temperatures. Previous experience in a particular area will help our representative suggest the proper dosage.

COLD WEATHER CONCRETE

KUT PLAST NC is not intended to prevent concrete from freezing. However, **KUT PLAST NC** makes cold weather concreting easier and safer. Concrete can be finished earlier and the time required for protection against freezing may be substantially reduced. This includes earlier removal of forms with resulting job economy.

ADVANTAGES

- Improves workability.
- Counteracts set-retarding effects of cold weather.
- Speeds setting time as much as 40%.
- Permits earlier finishing.
- Permits earlier removal of forms.
- Cuts concrete costs.
- Chloride free. Safe in reinforced concrete.

STANDARDS

KUT PLAST NC complies with **BS 5075** and **ASTM C494 Type C**.


TYPICAL PROPERTIES

- **Calcium Chloride Content:** Nil.
- **Specific Gravity:** 1.05 to 1.15 @ 20° C.
- **Air Entertainment:** Less than 1 % additional air is entrained.
- **Chloride Content:** Nil to BS 5075.

Setting Time:

Initial Set	-	Plain Cement
	3 hours 20 minutes	
Initial Set	-	KUT PLAST NC
	1 hour 15 minutes	
Final Set	-	Plain Cement
	5 hours 40 minutes	
Final Set	-	KUT PLAST NC
	2 hours 25 minutes	

COMPRESSIVE STRENGTHS
(2" X 2" X 2" cubes)
AGE DAYS

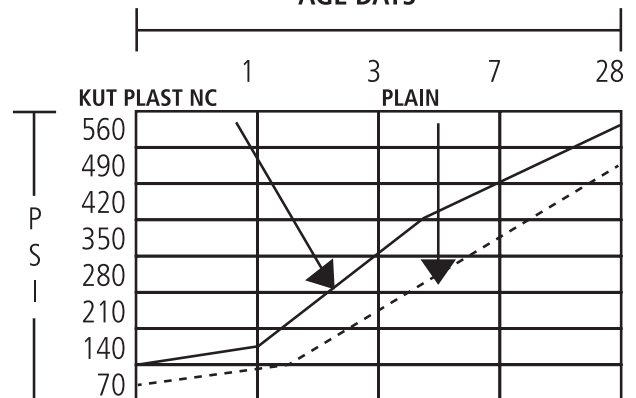

مصنع الخصوصية لكيماويات البناء
SPECIALITIES CONSTRUCTION CHEMICALS FACTORY

Marketed by: Alghanim Specialities Co. W.L.L.
Amghara Industrial Area, P.O.Box: 23595 Safat, 13096 Kuwait
Tel: 1802550 - 400 - Fax: +965 24582548 - Email: sales@spec-kw.com



- **Cement Compatibility:** Compatibility with sulphate resisting and other portland cements, high alumina cements and cement replacement materials such as **PFA, GGBFS Microsilica**.

recommended that all admixtures be added to concrete separately.

INSTRUCTION FOR USE

Dosage: The optimum dosage for **KUT PLAST NC** should be determined by site trials with actual site conditions. As a guide the dosage is normally 0.5 to 2.5 ltrs./ 50 kg. cementitious material.

Overdosing: The actual dosage can be decided by laboratory trials and will vary as per the cement type, temperature and prevalent ambient conditions. Any dosage above the required dosage will result in early loss of workability and must be avoided.

TECHNICAL SUPPORT

ASPEC provides technical support service on mix design, admixture selection, evaluation of trials, dispensing equipment etc. Please contact the technical Department in these cases.

As with all structural concrete, normal curing methods apply.

CLEANING

Spillages of **KUT PLAST NC** can be removed with water.

PACKAGING

KUT PLAST NC is supplied in 210 ltr. drums.

STORAGE

KUT PLAST NC should be protected from extremes of temperature. Should the material become frozen, it must be completely thawed and thoroughly mixed before use. **KUT PLAST NC** has a minimum shelf life of 12 months provided temperature is kept within the range of 5° C to 30° C.

PRECAUTIONS

HEALTH & SAFETY

KUT PLAST NC is non-toxic. Any splashes to the eyes should be washed immediately with water. Splashes to the eyes should be washed immediately with water and medical advice should be sought.

Fire: **KUT PLAST NC** is non flammable.

ASPEC endeavours to ensure that any information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

Distributor